

## A.R. & SINGLE-SIZE BLOCKING PLUGS (SSB)



and reliable test plugs available.


Plumbing and mechanical contractors agree that Lansas® Plugs are the most durable

**THE AR™ PLUGS**, 1-1/4" - 6" feature a zinc plated chain and ring. The Lansas® AR™ Plugs have a test pressure rating of as much as 15 PSI, air or water.

**THE SSB PLUGS** were developed to block sewer lines during an air test, or for blocking flows. These are the most economical inflatable plugs available.

These plugs are designed with a newly formulated natural rubber compound, making them the toughest and most dependable single size plugs available. Like the SST, the SSB plugs come with a removable 3/8" eyebolt and a removable 1/4" NPT tire inflation valve.

## TYPICAL PIPE APPLICATION

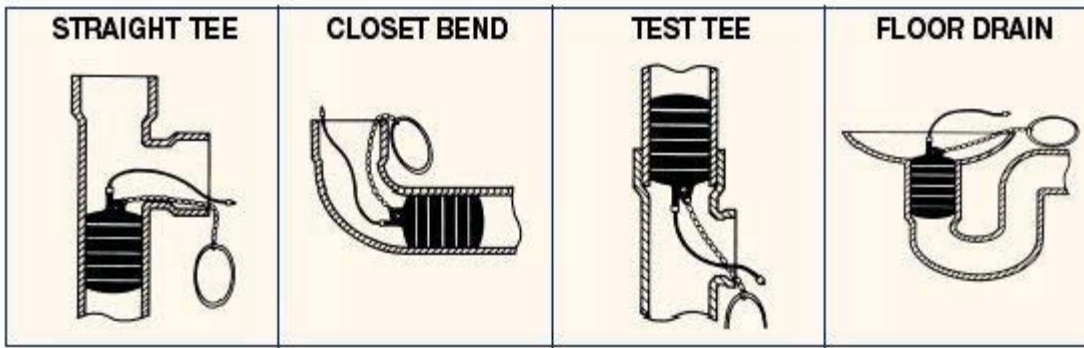

### CAUTION:

Block Plugs to prevent moving.  
 Click here for Safety Instructions.  
 Full safety information sent  
 with each plug.

### Lansas A.R. Plugs (All Rubber)

### Price Sheet Item # 9

PART NUMBER	PIPE SIZE	MIN. PIPE DIA.	MAX PIPE DIA.	REQUIRED INFLATION PRESSURE	MAXIMUM TESTING PRESSURE	PRODUCT DIMENSIONS		
						LTH.	DIA.	WT.
030-1.25	.75"-1.25"	.75"	1.35"	50 PSI	20 PSI	3.5"	0.65"	.1 lbs.
030-1.5	1.25"-1.5"	1.2"	1.60"	30 PSI	10 PSI	6.0"	1.00"	.6 lbs.
030-02	2"	1.8"	2.25"	30 PSI	10 PSI	6.0"	1.50"	.8 lbs.
030-03	3"	2.8"	3.25"	30 PSI	15 PSI	6.0"	2.60"	1.0 lbs.
030-34*	3 x 4"	2.6"	4.25"	45 PSI	15 PSI	7.25"	2.50"	.1 lbs.
030-04	4"	3.5"	4.25"	30 PSI	15 PSI	6.0"	3.30"	1.2 lbs.
030-46*	4 x 6"	3.5"	6.25"	45 PSI	15 PSI	11.0"	3.40"	1.9 lbs.
030-06	6"	5.5"	6.25"	30 PSI	15 PSI	6.0"	4.80"	2.5 lbs.
030-68*	6 x 8"	4.7"	8.25"	35 PSI	15 PSI	14.5"	4.50"	2.8 lbs.
035-08	8"	6.75"	8.25"	25 PSI	15 PSI	7.75"	6.69"	4.8 lbs.
035-10	10"	8.75"	10.25"	25 PSI	15 PSI	9.75"	8.63"	7.6 lbs.
035-12	12"	10.75"	12.25"	25 PSI	15 PSI	11.75"	10.38"	11.00 lbs.

030-15*	14"-16"	13"	16.25"	25 PSI	10 PSI	16.0"	12.75"	30.0 lbs.
030-18*	18"	17"	18.25"	25 PSI	10 PSI	16.0"	16.00"	37.0 lbs
030-21*	20"-21"	19"	21.25"	25 PSI	15 PSI	16.0"	18.50"	45.0 lbs.
030-24*	24"	23"	24.25"	25 PSI	15 PSI	16.0"	22.00"	55.0 lbs

\* Note: Not equipped with chain and ring  
 Sizes 6" - 12" have a removable inflation fitting and eyebolt.

## LONG A.R. PLUGS (ALL RUBBER)



THE LONG AR™ is designed to be installed through a cleanout or floor drain and seal within the wye. With a pressure rating of 15 PSI, these plugs are excellent for use when pressure testing with air or water.

**CAUTION:**  
 Block Plugs to prevent moving.  
 Click here for Safety Instructions.  
 Full safety information sent  
 with each plug.

The long AR plug is supplied with a 36" extension hose and a removable zinc-plated chain and ring.

Long AR Grip Rib				Price Sheet Item # 6					
PART #	PIPE SIZE	MIN. PIPE DIA.	MAX PIPE DIA.	REQUIRED INFLATION PRESSURE	MAXIMUM BACK/TEST PRESSURE	PRODUCT DIMENSIONS			
						LTH.	DIA.	WT.	
031-02	2"	1.7"	2.25"	30 PSI	15 PSI	17.5"	1.5"	.5lbs.	
031-03	3"	2.7"	3.25"	30 PSI	15 PSI	19.5"	2.2"	1.0lbs	
031-04	4"	3.5"	4.25"	30 PSI	10 PSI	23.0"	3.0"	2.0lbs.	
031-46	4"-6"	3.8"	6.25"	30 PSI	10 PSI	26.0"	3.6"	3.0lbs	

