




8" WALL



8H SERIES TRENCH SHIELD SIDEWALLS: sets of two									
MODEL	SIZE		PIPE CLEARANCE	WEIGHT (LBS)	SHIELD CAP. (PSF) (LBS)	MAXIMUM DEPTH PER SOIL TYPE (FT.)*			
	H	L				A	B	C-60	C-80
DOUBLEWALL									
8H416	4'	16'	16"	6161	3426	99	78	59	45
8H420	4'	20'	16"	7359	2310	94	53	41	31
8H424	4'	24'	16"	8535	1567	65	47	28	22
8H616	6'	16'	40"	8255	3731	99	86	65	50
8H620	6'	20'	40"	9959	2496	99	58	45	34
8H624	6'	24'	40"	11623	1693	71	41	31	24
8H816	8'	16'	64"	10401	2387	99	57	44	34
8H820	8'	20'	64"	12610	1910	80	46	36	28
8H824	8'	24'	64"	14764	1591	68	39	31	24
8H1016	10'	16'	76"	12547	2371	99	58	45	35
8H1020	10'	20'	76"	15262	1897	81	47	37	29
8H1024	10'	24'	76"	17904	1581	68	40	31	25

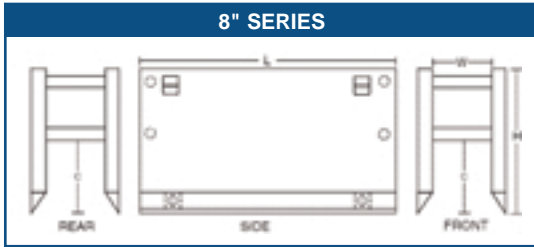

8DS Spreader Sets: For use on 4L, 4M, 6M, 6H, 8M & 8H Shields; 8" Schedule 80 Pipe														
Model	8DS24	8DS30	8DS36	8DS42	8DS48	8DS60	8DS72	8DS84	8DS96	8DS108	8DS120	8DS132	8DS144	
Inside Width	24"	30"	36"	42"	48"	60"	72"	84"	96"	108"	120"	132"	144"	
For 6' & 8' HIGH	Wt. lbs.	387	474	561	647	734	908	1081	1255	1524	1602	1776	1949	2123

8DS Spreaders include 2" diameter pin



ICM of America
Internet Sales
877-494-5793

*Depths are based on A,B,C-60 and C-80 soil types as described in OSHA's 29 CFR Part 1926 Subpart P, October 31, 1989, and publications of the Trench Shoring & Shielding Association (TSSA), with Type A not exceeding 25 PSF per foot of depth, Type B not exceeding 45 PSF per foot of depth, Type C-60 not exceeding 60 PSF per foot of depth, Type C-80 not exceeding 80 PSF per foot of depth. Determine actual soil pressures and consult Manufacturer's Tabulated Data prior to each use.