




8" WALL



8M SERIES TRENCH SHIELD SIDEWALLS: sets of two									
MODEL	SIZE		PIPE CLEARANCE	WEIGHT (LBS)	SHIELD CAP. (PSF) (LBS)	MAXIMUM DEPTH PER SOIL TYPE (FT.)*			
	H	L				A	B	C-60	C-80
DOUBLEWALL									
8M416	4'	16'	16"	4999	3022	99	69	52	40
8M420	4'	20'	16"	5907	1866	77	43	33	25
8M424	4'	24'	16"	6821	1265	53	30	23	18
8M428	4'	28'	16"	7275	914	39	22	17	13
8M430	4'	30'	16"	7702	791	34	20	15	12
8M616	6'	16'	40"	6750	3013	99	70	53	41
8M620	6'	20'	40"	8061	1860	77	44	34	26
8M624	6'	24'	40"	9381	1262	53	31	24	19
8M628	6'	28'	40"	10036	912	39	23	18	14
8M630	6'	30'	40"	11299	789	35	21	16	13
8M816	8'	16'	64"	8552	2387	99	57	44	34
8M820	8'	20'	64"	10265	1854	78	45	35	27
8M824	8'	24'	64"	11992	1258	54	32	25	20
8M828	8'	28'	64"	13637	909	40	24	19	15
8M830	8'	30'	64"	14494	786	35	21	17	14
8M1016	10'	16'	76"	10355	2033	86	50	39	30
8M1020	10'	20'	76"	12470	1627	70	41	32	25
8M1024	10'	24'	76"	14603	1255	55	33	26	21
8M1028	10'	28'	76"	16630	906	41	25	20	16
8M1030	10'	30'	76"	17688	784	36	22	18	15

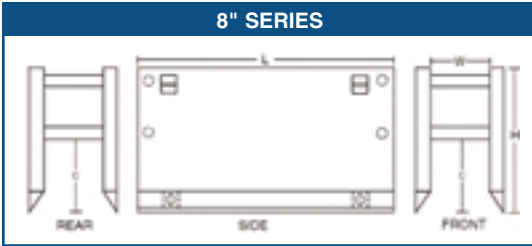

8DS Spreader Sets: For use on 4L, 4M, 6M, 6H, 8M & 8H Shields; 8" Schedule 80 Pipe														
	Model	8DS24	8DS30	8DS36	8DS42	8DS48	8DS60	8DS72	8DS84	8DS96	8DS108	8DS120	8DS132	8DS144
	Inside Width	24"	30"	36"	42"	48"	60"	72"	84"	96"	108"	120"	132"	144"
For 6' & 8' HIGH	Wt. lbs.	441	531	621	711	802	982	1163	1343	1524	1704	1885	2065	2246

8DS Spreaders include 2" diameter pin



*Depths are based on A,B,C-60 and C-80 soil types as described in OSHA's 29 CFR Part 1926 Subpart P, October 31, 1989, and publications of the Trench Shoring & Shielding Association (TSSA), with Type A not exceeding 25 PSF per foot of depth, Type B not exceeding 45 PSF per foot of depth, Type C-60 not exceeding 60 PSF per foot of depth, Type C-80 not exceeding 80 PSF per foot of depth. Determine actual soil pressures and consult Manufacturer's Tabulated Data prior to each use.

ICM of America
Internet Sales
877-494-5793