

Powered by heavy duty Deutz diesel engines.

4 inch and 6 inch suction and discharge designs.

Non-clog ductile iron impeller passes 2 inch solids with the 4 inch pump and 3 inch solids with the 6 inch pump.

Rubber lined front and rear wear plates resist oil and abrasives.


Grease lubricated tungsten carbide mechanical seals (oil lubricated seals also available).

Heavy-duty DOT road trailer with 15 inch 6-ply tires and 2 inch ball hitch (optional pintle hitch available).

Available in skid mounted design.



Performance Range

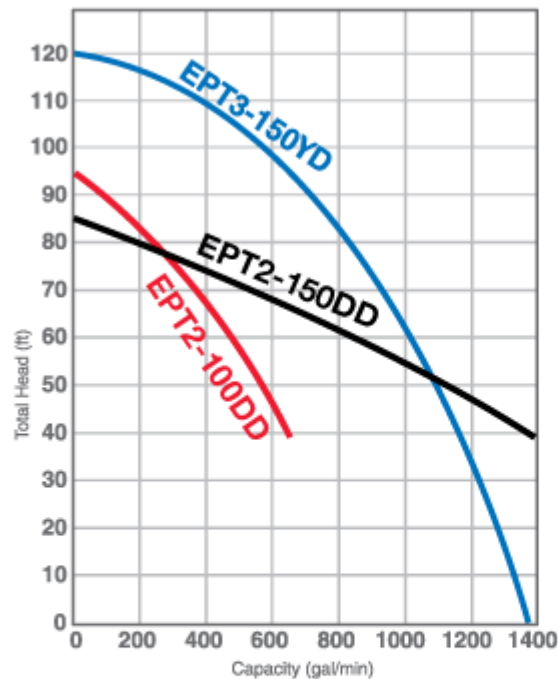

Model	Suction Size (in.)	Discharge Size (in.)	Engine Model	Shipping Weight (lbs.)	Shipping Dimensions (in.)
EPT2-100DD	4 NPT male	4	Deutz F2L1011	1800	100x64x59
EPT2-150DD	6 NPT male	6	Deutz F3L1011	2100	100x64x59
EPT3-150YD	6 NPT	6 NPT	Yanmar 3TNV88	1750	111x60x69