

Confined Space Ventilation

Non-Hazardous Location Ventilators

Saddle Vent® Ventilation™ Technology


Gasoline Powered Ventilation Kit
Model SVB-G8CUP



Centrifugal Blowers

Heavy Duty, Industrial Grade,
Ergonomically Designed

Did
You
KNOW?

Air Systems' electric blowers
and fans have been tested
by  to meet OSHA 29 CFR
1910.303(a) and 1910.7 for
electrical certification.

Single Speed Electric Blower

- 3/4 HP electric motor, TEFC, 115 VAC
- 10.8 amp, 60 Hz
- GFI power cord
- Aluminum non-sparking blower wheel
- Polyethylene fan housing
- Powder coat tubular steel frame with dual handles
- Molded polyethylene safety guards
- 8" intake and exhaust flange
- Inlet filters available
- Weight: 53 lbs.
- Dimensions: 23" L x 12" W x 19"H
- 1570 cfm, free air delivery
- 1047 cfm, 25ft. duct, 1 - 90° bend




SVB-E8



SVB-E8EC



SVB-E8-2

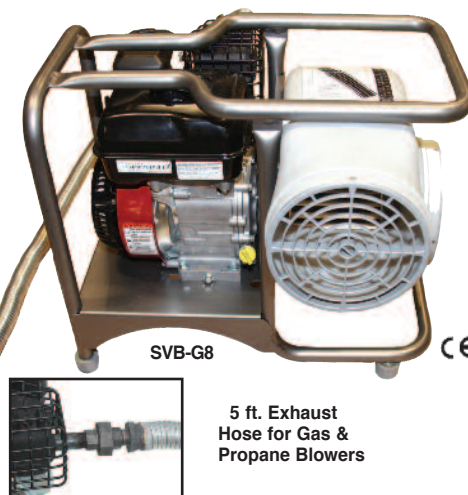

SVB-G8

5 ft. Exhaust
Hose for Gas &
Propane Blowers

Economy Electric Blower

- 1/2 HP electric motor, 9 amps, TEFC, 60 Hz, 115 VAC
- GFI power cord
- Steel blower wheel
- Polyethylene fan housing
- Powder coat steel frame
- Molded polyethylene safety guards
- 8" intake and exhaust flange
- Weight: 37 lbs.
- Dimensions: 17"L x 17"W x 18"H
- 1390 cfm, free air delivery
- 973 cfm, 25ft. duct, 1 - 90° bend

2-Speed Electric Blower

- 3/4 HP, 2-speed electric motor, TEFC
- 115 VAC, 11.5 amp, 60 Hz
- GFI power cord
- Aluminum non-sparking blower wheel
- Polyethylene fan housing
- Powder coat tubular steel frame with dual handles
- Molded polyethylene safety guards
- 8" intake and exhaust flange
- Weight: 58 lbs.
- Dimensions: 23"L x 12"W x 19"H
- 750 cfm low/1570 cfm high, free air delivery
- 490 cfm low/1047 cfm high, 25ft. duct, 1 - 90° Bend

Gasoline Powered Blower

- 127 cc Briggs & Stratton motor (Approx. 4 HP)
- Meets CAL/OSHA emission standards
- 5ft. remote flexible steel exhaust hose with custom gas-tight muffler to prevent intake of CO exhaust
- Polyethylene fan housing
- Powder coat tubular steel frame with dual handles
- Molded polyethylene safety guards
- 8" intake and exhaust flange
- Weight: 53 lbs.
- Dimensions: 23"L x 12"W x 19"H
- 1500 cfm min/3000 cfm max free air delivery
- 1040 cfm min/1725 cfm max, 25ft. duct, 1 - 90° bend

Inlet Filters Available for All Models. See page 57 for details

Honda Engine - Model SVB-G8-H

- 118 cc Honda engine option

Propane Engine - Model SVB-G8P

- Includes propane conversion kit, Briggs & Stratton engine and propane tank

Did
You
KNOW?

International blowers available.
Contact Customer Service for
details and specifications.