

ANCHORAGE CONNECTORS

ANCHORS MADE FOR CONCRETE, WOOD, STEEL AND PEACE-OF-MIND.

Anchor connectors are dependent on specific job requirements — the type of attachment, environment and connecting system. That's why we offer the most complete line, all rigorously tested to meet OSHA and ANSI standards and ensure strength. Our anchors are a secure point of attachment capable of supporting a load of 5,000 lbs. (22 kN) per worker. An anchor connector attaches your personal fall arrest system to the main anchorage or support structure.

GENERAL (ALL-PURPOSE) ANCHORS

Portable anchors used in a variety of applications. Many are "holter" style designed to provide a safe and easy way to anchor a fall protection device to an overhead location beyond normal reach.



STEEL ANCHORS

Anchors for steel are often used during commercial construction and attached to steel columns and beams. Models can be permanently attached or temporarily clamped, offering a fixed or mobile anchorage connector.




CONCRETE ANCHORS

Concrete anchors are secured to concrete decks and columns. They provide the worker with safety and mobility when performing concrete construction work.



ROOF ANCHORS

Roof anchors are available in a variety of designs to meet the specific requirements of your roof type. They are designed to keep the worker safe, without causing damage to the structure.

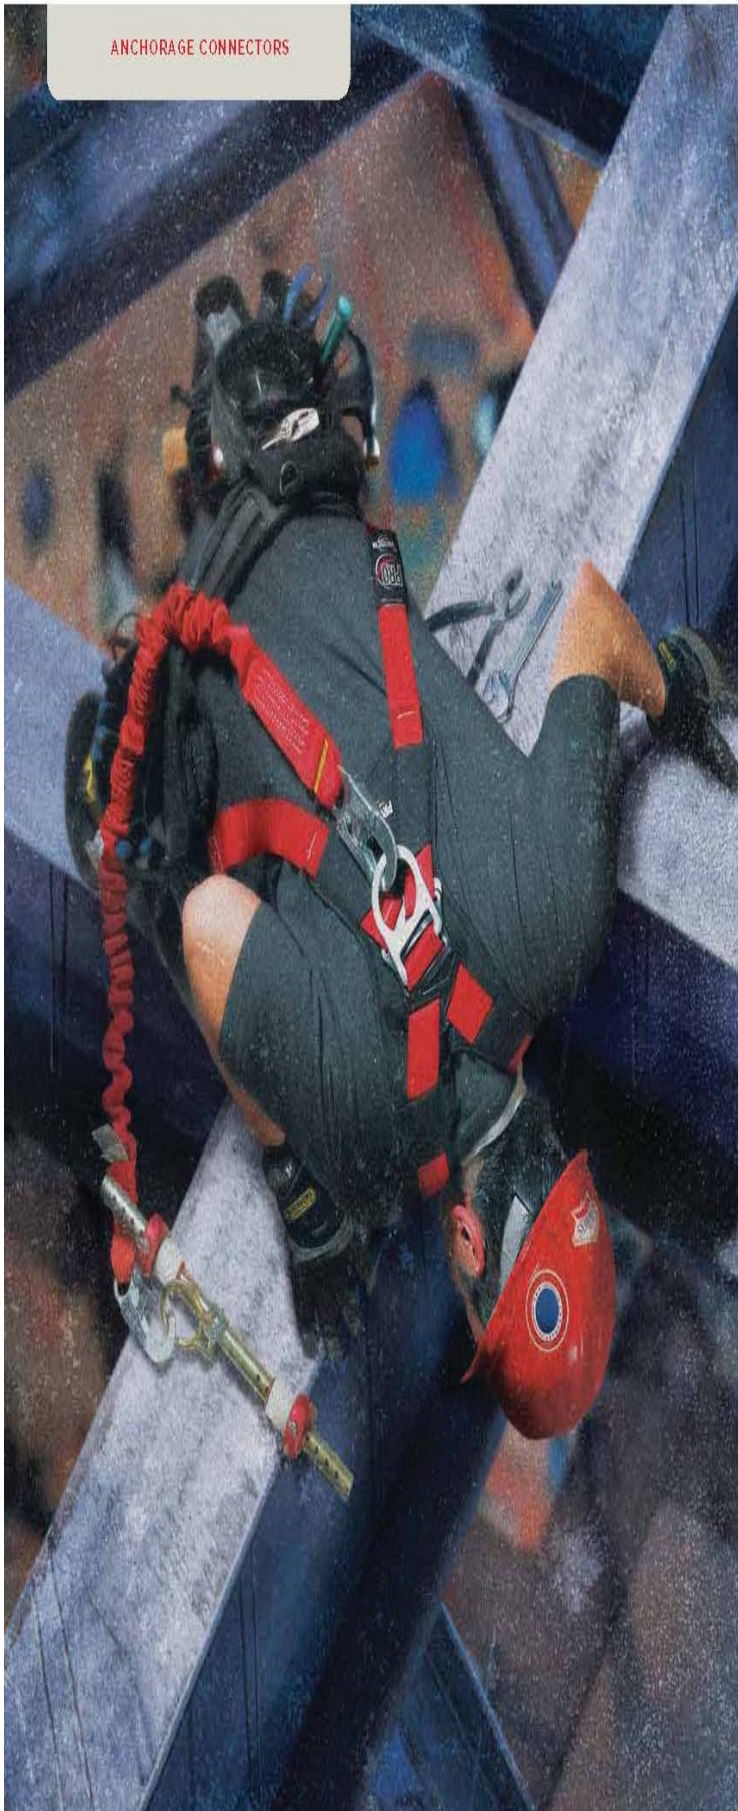

GENERAL (ALL-PURPOSE) ANCHORAGE CONNECTORS

Turn-tie adaptors are our most versatile anchorage connector combining ease of use, light weight and 5,000 lb. (22kN) high strength.



AM5086 WEB TIE-OFF ADAPTOR

Pass-through design makes attaching to anchorage quick and easy. 1-3/4" polyester strength member with 3" wide polyester wear pad x 6 ft. (1.8m).

AJ450A Web tie-off adaptor x 3 ft. (0.9m)

AJ47410 Web tie-off adaptor x 6 ft. (1.8m) with web loop and D-ring pass-thru

AJ47410A-3 Web tie-off adaptor x 3 ft. (0.9m) with web loop and D-ring pass-thru

AJ4086G CABLE TIE-OFF ADAPTOR

Lightweight and extremely durable 1/4" (6.4mm) coated galvanized cable stands up to harsh environments. 6 ft. (1.8m) length with snap hook at one end, D-ring at the other.



AJ4086G

AJ407AG Cable tie-off adaptor with thimble eyes only (no hook or D-ring)

AJ47406 Cable tie-off adaptor with two D-rings

Carabiners are an extremely versatile choice to keep your system securely connected. Workers appreciate the reduced weight and easy operation they offer. 5,000 lb. (22kN) minimum breaking strength for added safety.



2800115 CARABINER

Steel carabiner with 3,600 lb. (16kN) self-closing/locking gate, 9/16" (14mm) opening.

AJ514A Steel carabiner with manual twist locking gate, 3/4" (19mm) opening

AJ595A Steel carabiner with manual twist locking gate, 2" (50.8mm) opening

STEEL ANCHORAGE CONNECTORS

Extremely versatile anchors for steel are lightweight and compact, providing an easy to install and safe 5,000 lb. (22kN) tie-off point for your personal fall protection system.



AJ704A BEAMDOG™ SLIDING BEAM ANCHOR

For use on top or below an I-beam with flanges 4" to 14-3/4" (10cm - 37.4cm) wide and up to 1-1/2" (3.8cm) thick. Nylon rollers provide smooth, effortless operation along the beam.

AJ703A RAILDOG™ SLIDING RAIL ANCHOR

Provides mobile anchor point on 2-3/4" to 3-1/4" (7cm - 8.25cm) wide rails. Incorporates stainless steel construction and special 5,000 lb. (22kN) gate rebar carabiner.



AN111A EYEBOLT ANCHOR - UNTHREADED

Unthreaded ring only (no bolt), forged steel construction with zinc plating, 1-1/2" ID anchor area.



AN112A EYEBOLT ANCHOR - THREADED

Forged steel construction with zinc plating, 1/2" x 1-3/8" mounting bolt, 2-3/4" ID horizontal anchor area, 1-3/8" ID vertical anchor area.




AJ301A HAND GRIP

2" (5cm) capacity. One hand operation with plastic grips for comfort.

AJ302A Hand Grip with 3" (7.6cm) capacity

AJ303A Hand Grip with 4" (10cm) capacity



CONCRETE ANCHORAGE CONNECTORS

Our concrete anchors are lightweight and compact, providing an easy to install and safe 5,000 lb. (22kN) tie-off point for your personal fall protection system.

2190057 CONCRETE ANCHOR STRAP

Pack of 25 disposable anchor straps with D-ring x 3-1/2 ft. (1m) is designed to provide a temporary anchorage on concrete forms. Loop slips over rebar, then concrete is poured over. When no longer needed, simply cut strap and discard.

2190058 Concrete Anchor Strap with D-Ring x 4 ft. (1.2m) - Pack of 25

2190063 Concrete Anchor Strap without D-Ring x 3-1/2 ft. (1m) - Pack of 25



2190053 REUSABLE CONCRETE WEDGE ANCHOR

Portable, durable and safe concrete anchor for vertical wall or overhead ceiling applications. Easy to use for added safety and flexibility.

2190055 CONCRETE D-RING ANCHOR

Simple, versatile and safe concrete anchor for temporary or permanent applications. Extremely rugged design for extended life and jobsite flexibility.

2190060 Concrete D-ring anchor with 6 bolts



AJ720A CONCRETE ANCHOR PLATE

Mounts horizontally or vertically to concrete or steel and includes forged D-ring for tie-off point.



AN220A CONTINUOUS CONCRETE INSERT ANCHOR

Provides a mobile anchor in standard strut material. Stainless steel plates with steel carabiner. Accommodates 1-5/8" (4.1cm) wide strut material.



ROOF ANCHORS

We offer a complete array of anchorage devices for sloped wood and flat commercial steel roofs to help you customize the perfect fall protection solution.

AJ730A PORTABLE REUSABLE ROOF ANCHOR

For use on flat or sloped wood roofs. Installs with 20 ea. 16D nails. Simple hinge style design is extremely easy to transport, install, dismantle and store.

2103680 KNOCK DOWN DISPOSABLE ROOF ANCHOR KIT

Simply nail into sheathing and roof member. When job is complete, knock down or shingle over. Kit contains 12 anchors and nails.

2103678 PERMANENT RIDGE ROOF ANCHOR

Installs with nails at the roof ridge. Shingle over leaving only the D-ring exposed. Provides fall protection during initial construction as well as for future homeowner.



2190001 STANDING SEAM ROOF ANCHOR

Portable and reusable anchor fits seam spacing of 12" to 24" (30cm-61cm). Non-penetrating clamp design won't damage the roof. Universal self retracting lifeline (SRL) cradle fits most SRLs and swivels 360° for maximum mobility and protection.

