





GBW — GloBug Solo

When space is limited but illumination is required, call on the MultiQuip GloBug Solo GBW Series

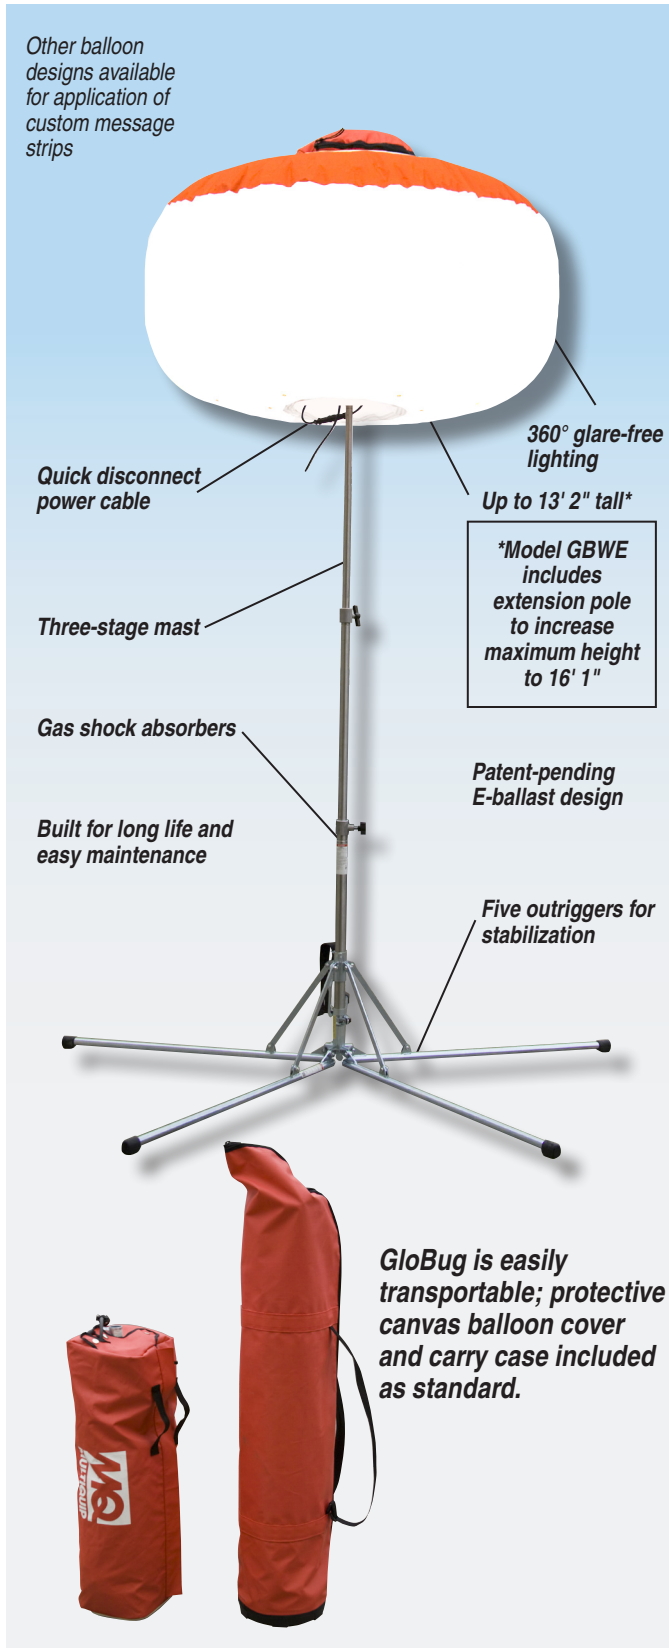

- **Metal Halide lamp** — single 1,000 watt lamp for maximum illumination. Pure white light — 3400° K.
- **360° glarefree illumination** with standard balloon.
- **Quick restrike time** — 3 to 5 minutes.
- **Universally adaptable to all AC power supplies** — accepts 50/60Hz, 100-240V.
- **Downward direct illumination** with reflector balloon.
- **Self-inflating balloons** are easy to install and inflate in less than 20 seconds.
- **Optional message strip available.**
- **Three-stage mast** — extends up to 13' 2".
- **Five outriggers** for great stabilization.
- **Light coverage up to 150 feet.**

Illumination Range

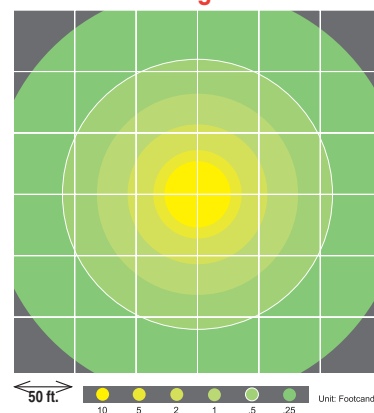

GBBAL115D

Footcandles	Feet
10	27
5	36
2	57
1	82
0.5	110
0.25	168

Specifications

Model	GBW	GBWE
Voltage (V)	100 to 240V	
Amps (A)	9.3 @ 120V	
Hz	50-60	
Minimum Wattage Required	1,200 Watts	
Plug Type	5 - 15P	
Lamp Type	1,000 watt Metal Halide (x1)	
Total Luminous Flux (lm)	110,000	
Standard Balloon Diameter in. (mm)	47.2 (1200)	
Outriggers	5	
Mast — Number of stages	3 Stages (Air Shock Absorbers)	
Lower Position Working Dimensions LxWxH in. (mm)	73.2 x 77.2 x 90.6 to 141.7 (1,860 x 1,960 x 2,300 to 3,600)	
Upper Position Working Dimensions LxWxH in. (mm)	64.6 x 67.9 x 107 to 158.3 (1,640 x 1,725 x 2,720 to 4,020)	64.6 x 67.9 x 107 to 193.3 (1,640 x 1,725 x 2,720 to 4,910)
Storage Dimensions LxWxH in. (mm)	Lamp: 8.7 x 8.7 x 40 (220 x 220 x 1015) Pentapod: 7.9 x 8.7 x 28.3 (200 x 220 x 720)	
Balloon Dimensions LxWxH in. (mm)	47.2 x 47.2 x 28.3 (1200 x 1200 x 720)	
Weight lb. (kg)	56 (25.6)	60.7 (27.5)