



MLT Series - Model MLT


The **MLT** represents the base unit for the MLT - Series light towers. The unit is offered without a power source for contractors/operators who already own a Multiquip DA7000SSA1 generator or SDW225SSA1 welder. In addition, the MLT can easily connect to an alternate external power source to provide lighting for indoor/outdoor applications.

Features

- **Cross Drilled T-Bar** - provides choice of vertical or horizontal mounting
- **Aluminized Collection Tube** - increased corrosion resistance
- **Cable Grip Strain Relief** - reduces fatigue on the tower electrical lead
- **Superior Wind Stability** - 45 mph w/o generator
- **Industrial Winch and Ratchet System** - 1,500 lb. capacity
- **Zinc Dichromate Tower Sections** - for strength, corrosion resistance
- **L14-30P Plug** - for power connections, NEC/NEMA approved
- **Ballast Box Built Into Trailer Tongue** - secure, water tight
- **Mast Tension Spring** - operate at all angles, no 'spring kick'
- **Industrial Torsion-Spring Axles** - minimizes travel vibrations
- **(4) Rugged 1000W Metal Halide Lamp Fixtures**
- **Rugged Captive Locking Pins With Tower Resting Saddle**
- **Quick-Disconnect Light Wiring Fixtures**
- **Zinc Dichromate Outriggers & Socket Tubes w/ Locking Pins**
- **Mast Fork Lift Pockets**



Each Floodlight requires a ballast for starting. They are built into the tongue of the trailer in an easy to service weather resistant

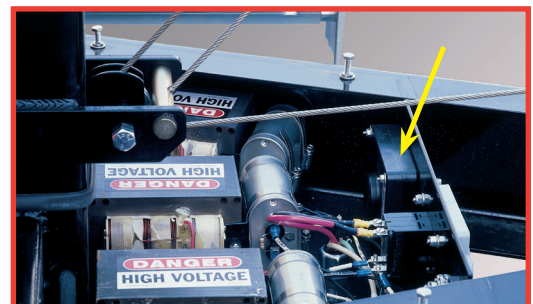

compartment. An internal fan ensures proper cooling. The Light Control Panel is positioned outside The compartment and contains (2) single-pole 20A ON/OFF circuit breakers.

ICM of America Internet Sales 877-494-5793