


**HYDROSTATIC TEST PUMPS**

**Model DPH-3B • 11GPM • 550PSI**

\* Shown with optional Wheel and Handle Kit.

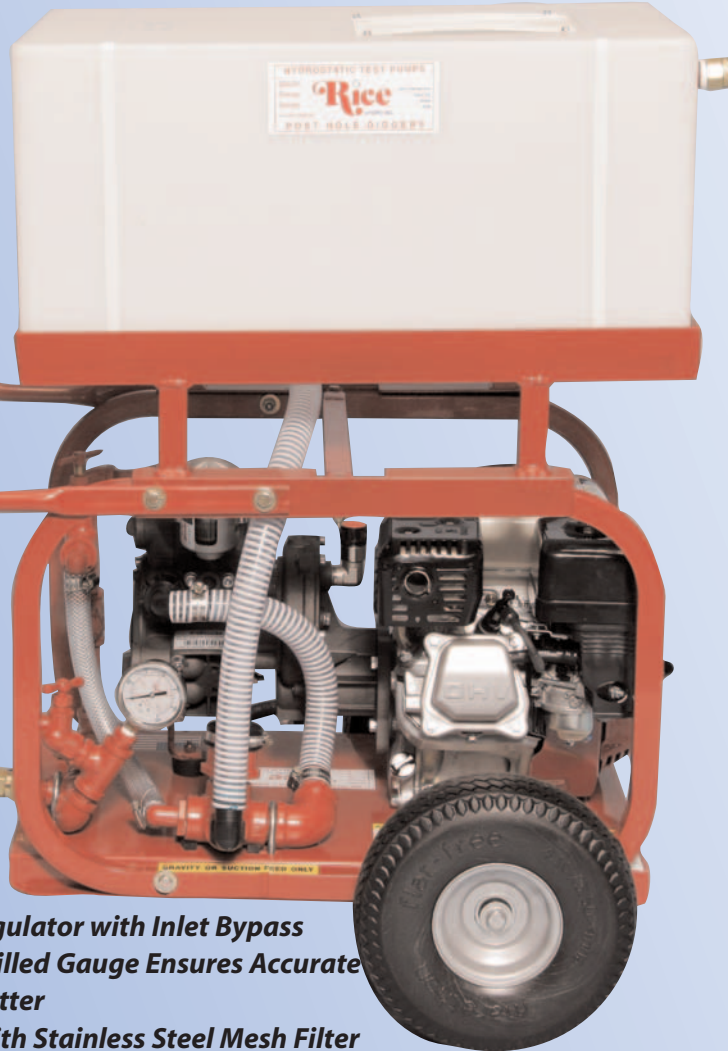

- **Automatic Pressure Regulator with Inlet Bypass**
- **Stainless Steel Liquid-Filled Gauge Ensures Accurate Readings, with Less Flutter**
- **Inlet Hose Assembly, with Stainless Steel Mesh Filter**
- **Rugged Roll-Cage Construction Protects Pump from Damage**

The DP-3, a triple diaphragm pump, recognized as the most versatile sought after hydrostatic test pump on the market. Exceptionally smooth and quiet operation in comparison to the twin diaphragm, the triple diaphragm requires no pressure accumulator. EXCLUSIVE, to the RICE Hydro triple diaphragm pump is the "DURApragm technology", where pressure is spread across the entire face of the diaphragm virtually eliminating torn, damaged diaphragms. Another design upgrade is the inlet suction diaphragm assembly, eliminating the concern for ruptured diaphragms caused by pressure feeding, is now a separate assembly from the pump, which can be added at any time. The diaphragm design allows for the handling of up to a 10% chlorine solution, and the ability to be run dry without damaging the pump. A large volume, medium pressure test pump, this unit is recommended for testing up to 24" diameter lines. The DP-3 is available with Briggs & Stratton, Robin or Honda engine options.

**S P E C I F I C A T I O N S**

- **INLET:** 1" hosebarb, with 9ft. hose and strainer  
Inlet hose assembly included on units not purchased with tank accessory
- **OUTLET:** 1/2" with Quick Connect Couplings  
High pressure 8ft. hose  
Pressure regulator adjusting to 550 PSI
- **PUMP:** Triple Diaphragm, inner oil bath protection, innovative "DURApragm technology", and helical gear reduction.
- **OUTPUT FLOW:** 11 GPM
- **MAX. OUTPUT PRESSURE:** 550 PSI
- **ENGINE:** 163 CC Displacement, air-cooled, 4-cycle, Briggs or Honda engine option available
- **SHIPPING DIMENSIONS:** 25" x 21" x 17"
- **SHIPPING WEIGHT:** 106#, Weight: 91#