

Multi-Size FatBoy Testers™

Our FatBoy Tester™ plugs come standard with **3/4" and 1/4"** bypasses allowing for easy transition from a blocking plug to an air testing plug.

Natural rubber construction gives our FatBoy Tester™ plugs a sizable usage range and long lasting durability.

Removable/replaceable 1/4" tank valve (tire valve) standard on all Fatboy Testers™.

Cross-woven fabric gives our plugs strength and durability.

The lightweight aluminum bypasses on our 8"-12" and smaller FatBoy Testers™ plugs make them 30% lighter than our competitors.

Flexible bypasses on our 12"-18" and larger plugs make our Testers™ plugs flexible and easy to install.

Optional Max-Guard™ on 15"-30" and larger plugs. The Max-Guard™ relief valve helps prevent the plug from being over inflated due to user error or malfunctioning gauges.

Innovative manufacturing process allows our 15"-30" and larger plugs to be vulcanized in one cure. This process also allows us use high strength cording throughout the plug and around each end of the plug to ensure maximum strength and durability.



Pictured: 225-1530MG



Recommended Applications:
Air Testing (testing and blocking side), Blocking Flow, Vacuum Testing.

PLUG TECHNOLOGIES PLUGS SOLD BY ICM OF AMERICA


Multi-Size FatBoy Testers™

Description	Part #	Size Usage Range		Maximum Allowable Back Pressure PSI and Head	Required Inflation Pressure	Weight	Deflated Diameter	Deflated Length	Inflation Fitting	Eye Bolts Size & Quantity	Bypass Size (s)
		Minimum Diameter	Maximum Diameter								
6"-10" FatBoy Tester™	225-610	6" 150mm	10.58" 268mm	13 PSI 30 Ft	25 PSI	6.5lbs	5.25"	16"	1/4" Tank Valve (removable)	(1) 3/8" (1) Optional 3/8" on Backside of plug	3/4" and 1/4"
8"-12" FatBoy Tester™	225-812	8" 200mm	12.64" 321mm	13 PSI 30 Ft	25 PSI	10 lbs	6.5"	19"	1/4" Tank Valve (removable)	(1) 3/8" (1) Optional 3/8" on Backside of plug	3/4" and 1/4"
12"-18" FatBoy Tester™	225-1218	12" 300mm	18.5" 450mm	13 PSI 30 Ft	25 PSI	31 lbs	10.75"	28"	1/4" Tank Valve (removable)	(1) 3/8" (1) Optional 3/8" on Backside of plug	3/4" and 1/4"
12"-24" FatBoy Tester™	225-1224	12" 300mm	24.5" 600mm	13 PSI 30 Ft	30 PSI	27 lbs	10.75"	37"	1/4" Tank Valve Removable	3/8" (2) (1) Optional 3/8" Backside Eyebolt	3/4" and 1/4"
15"-30" FatBoy Tester™	225-1530	14" 375 mm	30.5" 750mm	11 PSI 25 Ft	25 Psi	51 lbs	13.75"	50"	(1) 1/4" Tank Valve (removable) (1) 1/2" (F) NTP Port	(2) 1/2" Eyebolts (2) Optional 1/2" on Backside	3/4" and 1/4"
15"-30" FatBoy Tester™ With Max-Guard™ (Relief Valve)	225-1530MG	14" 375 mm	30.5" 750mm	11 PSI 25 Ft	25 Psi	51 lbs	13.75"	50"	(1) 1/4" Tank Valve (removable) (1) 1/2" (F) NTP Port	(2) 1/2" Eyebolts (2) Optional 1/2" on Backside	3/4" and 1/4"
15"-30" FatBoy Tester™ With Max-Sleeve™ Installed	225-1530MS	14" 375 mm	30.5" 750mm	11 PSI 25 Ft	25 Psi	72 lbs	13.75"	50"	(1) 1/4" Tank Valve (removable) (1) 1/2" (F) NTP Port	(2) 1/2" Eyebolts (2) Optional 1/2" on Backside	3/4" and 1/4"
15"-30" FatBoy Tester™ With Max-Guard™ (Relief valve) and Max-Sleeve™ Installed	225-1530MGMS	14" 375 mm	30.5" 750mm	11 PSI 25 Ft	25 Psi	72 lbs	13.75"	50"	(1) 1/4" Tank Valve (removable) (1) 1/2" (F) NTP Port	(2) 1/2" Eyebolts (2) Optional 1/2" on Backside	3/4" and 1/4"



**500-812 Tru-Test™ Max-AT™
Line Acceptance Kit**

**430-30 Tru-Test™ Fill Kit/
Retrieval Rope with Gauge**

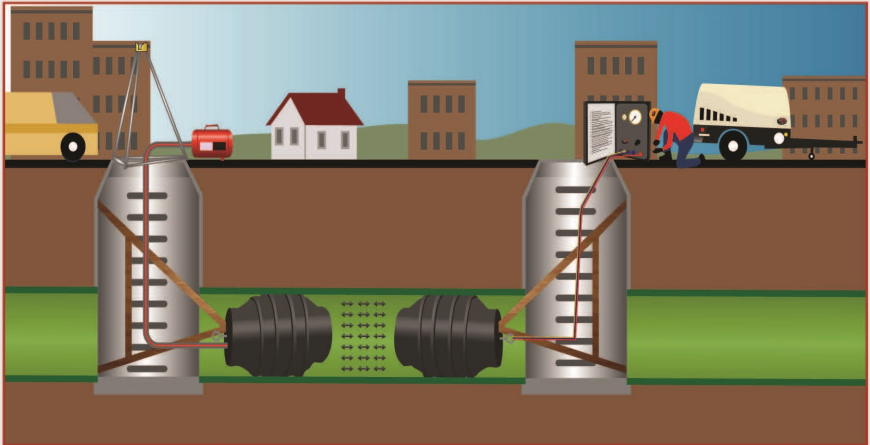

Home of the FatBoy Plugs!

**ICM OF AMERICA
877-494-5793**



6