

LAD-SAF™ FLEXIBLE CABLE LADDER SAFETY SYSTEMS

The Lad-Saf™ flexible cable system consists of a top and bottom bracket that act as anchors for a steel cable that runs the length of the climbing area. A Lad-Saf™ sleeve connects the worker to the system, automatically follows the user during the climb and locks onto the cable in the event of a fall, allowing the user to regain their footing. Designed for ease of use, economy and versatility, you can bolt or weld the system, choose rung clamp sizes/styles, choose systems for straight or curved ladders and for connection to wood, concrete or steel structures.

HANDS-FREE CLIMBING AND PROTECTION

The Lad-Saf™ sleeve automatically follows the user, can be attached anywhere along the cable and locks in the event of a fall.

TENSION INDICATOR

Integrated tension indicating bottom bracket takes the guesswork out of installation.

CUSTOMIZABLE

Hundreds of different brackets, styles and configurations to suit almost any application.

CORROSION RESISTANT CONSTRUCTION

Galvanized and stainless steel construction stands up to harsh environments for added longevity.

SHOCK ABSORBING DESIGN

Integrated shock absorbing top bracket reduces forces imposed on ladder structure during a fall.

INTERMEDIATE CABLE GUIDES

Prevents cable wear against the ladder and permits the climber to bypass without disconnecting.

LAD-SAF™ FIXED LADDER SAFETY SYSTEM



6116280

STANDARD TOP BRACKET

Galvanized top bracket with mounting hardware. For systems up to 499 ft. (152 m) high, fits up to 1-1/8" (2.85 cm) rung diameter, attaches to 3 rungs, built-in energy absorber.

6116410

Standard top bracket and hardware for systems over 500 ft. (152.4 m).

6110000

CABLE LIFELINE

Galvanized cable, 3/8" (9.5 mm) diameter, 1x7 type. Last 3 digits in part number indicate length.

6100400

CABLE GUIDE

Non-metallic cable guide with mounting hardware. For systems up to 199 ft. (60.6 m), fits up to 1-1/8" (2.85 cm) rung diameter. Must have 1 every 25 ft. (7.6 m).

6100515

Cable guide and hardware for systems over 200 ft. (61 m).

6116540

LAD-SAF™ FLEXIBLE CABLE SLEEVE

Climbing sleeve - see product details to right.

6100090

STANDARD BOTTOM BRACKET

Fits up to 1-1/8" (2.85 cm) rung diameter, attaches to 2 rungs, tensioning device, galvanized.

LAD-SAF™ FLEXIBLE CABLE SLEEVE

The Lad-Saf™ sleeve is globally recognized and preferred because of its user friendly and reliable design. The sleeve is easily attached or removed anywhere along the cable and automatically follows you as you climb or descend. In the event of a fall, the device locks onto the cable lifeline allowing you to regain your footing and continue to climb.



6116540

LAD-SAF™ FLEXIBLE CABLE SLEEVE

For use with 8mm or 3/8" diameter 1x7 or 7x19 solid core cable. Comes with 2000112 carabiner. Meets OSHA and ANSI standards.

6116541

Lad-Saf™ Flexible Cable Sleeve without carabiner.




6116507

LAD-SAF™ FLEXIBLE CABLE SLEEVE

For use with 8mm or 3/8" diameter 1x7 or 7x19 solid core cable. Comes with 2000117 carabiner and integrated shock absorber for global compliance.

VERTICAL SYSTEMS

LAD-SAF™ STEEL POLE (WELD-ON) LADDER SAFETY SYSTEM

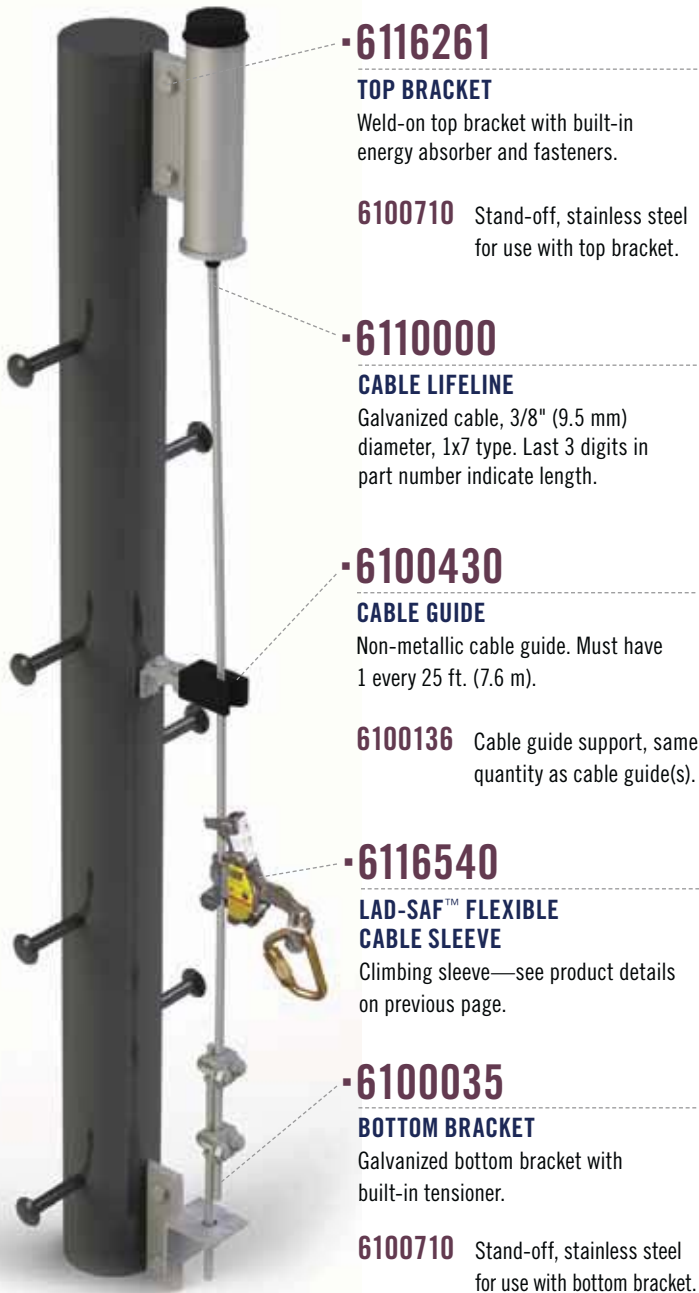

Angle-iron clamp-on and wood pole bolt-on systems also available — call today.



LAD-SAF™ CURVED LADDER SAFETY SYSTEM





LAD-SAF™ LADDER ACCESSORIES

6116336

GRAB BAR EXTENSION

Slides into 6116054 top bracket of fixed ladder safety system and provides the user with a tie-off point (for lanyard) when connecting or disconnecting from the system's lifeline.

6116054

Top bracket assembly for use with 6116336 (replaces standard 6116280 top bracket).

6147000

TELESCOPING EXTENSION

Self-contained ladder safety system can be returned to its stored position when not in use below the opening so it can be covered.

- Telescoping top bracket with hardware
- Galvanized cable lifeline
- Counterweight to tension lifeline
- Order by length—last three digits in part number indicate length

6116038

LADDER MAST

Galvanized removable extension with pulleys, mounting bracket for winch/SRL.

6116027

Galvanized bottom mounting bracket attaches 6116038 to ladder.

6116026

LADDER ANCHOR POST

Galvanized removable extension with eye-bolt anchor to attach 3-way SRL.

6116027

Galvanized bottom mounting bracket attaches 6116026 to ladder.

5901980

LADDER GATE

Protects you from the dangers (and liability) of unauthorized ladder access.

- Fits ladder widths up to 20" (50.8 cm)
- Mounting hardware included
- Aluminum construction
- 8 ft. (2.4 m) height x 36" (91.4 cm) width



ICM of America Internet Sales
877-494-5793