

SPOT REPAIR CARRIER



New
Sizes

SPOT REPAIR CARRIER

The Lansas Spot Repair (Point Repair) Carrier was designed for use with most of the Spot Repair Systems on the Market today. For Maximum flexibility and durability our carriers are designed with a fabric reinforced natural rubber bladder. LANSAS has two new sizes available. A 3"-4" and 4"-6" Multi-Size Carrier featuring a domed aluminum end to help navigate through any bends or offset joints in the pipe. Also available is a wheel kit or our new cage design on sizes 6"-10" and larger.

Custom Designs
Are Always™ Available



5-Line™ SINGLE-SIZE DISC PLUGS

The LANSAS Single Size Disc Plug has been around for more than 60 years and was the first plug manufactured by LANSAS in 1955! The LANSAS Single Size Disc Plug has been redesigned from the ground up. It now has a wider footprint in the pipe and a bladder made with our newly reformulated rubber compound. With **RP2** the addition of the Pressure Relief Valve the Disc Plug is now part of the 5-Line™. These plugs are available in standard sizes up to 96" in diameter. Custom sizes are available up to 152" in diameter in virtually any shape desirable. Disc plugs can be sectioned to fit through smaller openings. Note: Sectioned plugs are not recommended for air testing.



"E-Z PLUG"™ ADAPTER

THE LANSAS "E-Z PLUG"™ SYSTEM

is designed to provide a safe, fast, and cost effective method for plugging gravity flow pipe lines.

The "E-Z Plug"™ system will utilize an adapter and either a new or existing single or multi-size test plug or by-pass plug. By using the "E-Z Plug"™ system you will eliminate the need to set up for confined space entry when installing test plugs. The time required to install a test plug will be reduced to only a few minutes. The cost will be reduced by thousands of dollars by eliminating ventilators, safety harnesses, gas detectors, and other costly equipment. The Lansas "E-Z Plug"™ system is designed to save time and money on every job. The "EZ-Plug"™ adapter can be used on any plug that has a removable 3/8" eye-bolt.




Model No. 705
E-Z Plug Adaptor
shown with the
new 8" SST™ Plug



MULTI-SIZE WASHING BALLS

THE LANSAS MULTI-SIZE WASHING BALLS have a similar design to the original Wayne Ball. This design, along with adequate head pressure, creates a water vortex action along the pipe walls. This action will wash away packed sand, sludge, rock, grease, and other debris. The Multi-Size Washing Ball is built with the same design and construction as our Domehead™ plugs. These balls have a water fill port that allows the user to control the buoyancy. This feature enhances the performance of these products.

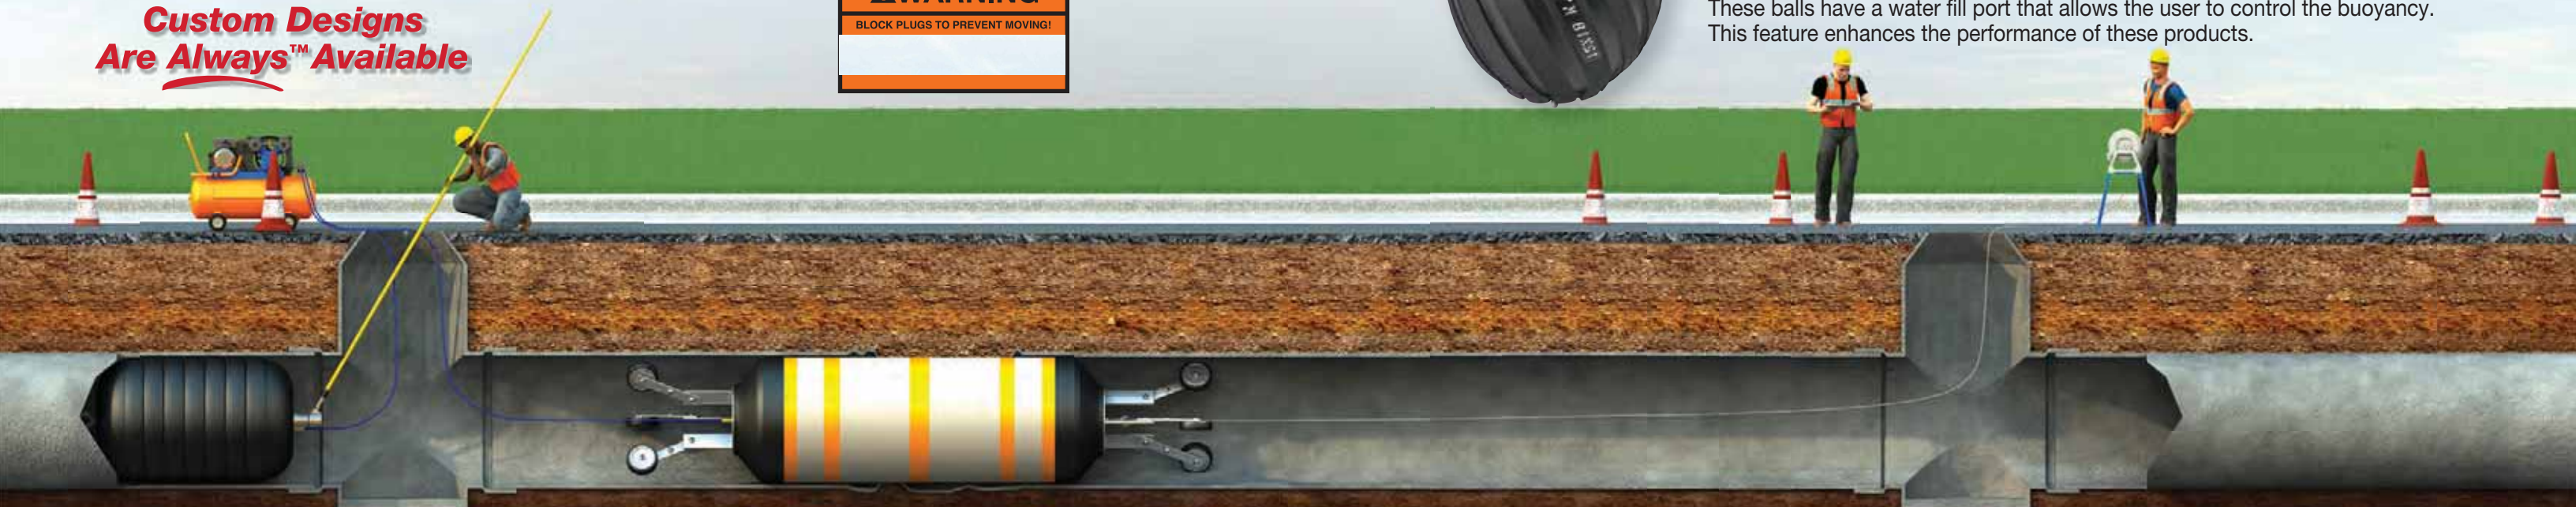



New
Sizes

SPOT REPAIR CARRIER								
PART NUMBER	FOR PIPE SIZE	REQUIRED INFLATION PRESSURE	CONTACT AREA		MAXIMUM PIPE DIAMETER	DEFLATED DIAMETER	BY-PASS SIZE / HOSE I.D.	
			3"	4"				
805-34-05	3"-4"	30 psi	47"	51"	4.25"	2.25"	N/A	
805-34-08	3"-4"	30 psi	83"	87"	4.25"	2.25"	N/A	
805-34-10	3"-4"	30 psi	107"	111"	4.25"	2.25"	N/A	
805-34-12	3"-4"	30 psi	131"	135"	4.25"	2.25"	N/A	
			4"	6"				
805-46-05	4"-6"	30 psi	48"	52"	6.25"	3.0"	N/A	
805-46-08	4"-6"	30 psi	84"	88"	6.25"	3.0"	N/A	
805-46-10	4"-6"	30 psi	108"	112"	6.25"	3.0"	N/A	
805-46-12	4"-6"	30 psi	132"	136"	6.25"	3.0"	N/A	
			6"	8"	10"			
805-610-05	6"-10"	25 psi	50"	50"	47"	10.25"	4.25"	1.5"
805-610-08	6"-10"	25 psi	85"	85"	83"	10.25"	4.25"	1.5"
805-610-10	6"-10"	25 psi	109"	109"	107"	10.25"	4.25"	1.5"
805-610-12	6"-10"	25 psi	133"	133"	131"	10.25"	4.25"	1.5"
805-610-15	6"-10"	25 psi	179"	179"	177"	10.25"	4.25"	1.5"
			8"	10"	12"			
805-812-05	8"-12"	25 psi	48"	46"	45"	12.25"	5.25"	2.0"
805-812-08	8"-12"	25 psi	84"	82"	81"	12.25"	5.25"	2.0"
805-812-10	8"-12"	25 psi	108"	106"	105"	12.25"	5.25"	2.0"
805-812-12	8"-12"	25 psi	132"	130"	129"	12.25"	5.25"	2.0"
805-812-15	8"-12"	25 psi	168"	164"	163"	12.25"	5.25"	2.0"
			12"	15"	18"			
805-1218-05	12"-18"	20 psi	49"	44"	43"	18.25"	8.75"	3.0"
805-1218-08	12"-18"	20 psi	85"	80"	79"	18.25"	8.75"	3.0"
805-1218-10	12"-18"	20 psi	109"	104"	103"	18.25"	8.75"	3.0"
805-1218-12	12"-18"	20 psi	133"	128"	127"	18.25"	8.75"	3.0"
805-1218-15	12"-18"	20 psi	169"	164"	163"	18.25"	8.75"	3.0"
			18"	20"	24"			
805-1824-05	18"-24"	15 psi	47"	44"	42"	24.25"	14.75"	4.0"
805-1824-08	18"-24"	15 psi	83"	80"	78"	24.25"	14.75"	4.0"
805-1824-10	18"-24"	15 psi	107"	104"	102"	24.25"	14.75"	4.0"
805-1824-12	18"-24"	15 psi	131"	128"	126"	24.25"	14.75"	4.0"
805-1824-15	18"-24"	15 psi	167"	164"	162"	24.25"	14.75"	4.0"

Spot Repair carriers available without bypasses



IMPROVED CONSTRUCTION METHODS
877-494-5793

SINGLE SIZE DISC PLUG						
FOR AIR TESTING, PRESSURE MONITORING OR STOPPING PIPELINE FLOW						
PART NUMBER	RANGE OF USE		REQUIRED INFLATION PRESSURE	MAXIMUM BACK/TEST PRESSURE	PRODUCT DIMENSIONS	
	MINIMUM PIPE DIAMETER	MAXIMUM PIPE DIAMETER			LENGTH	DIAMETER
515-24	23.5"	24.25"	20 psi	5 psi	10"	23.5"
515-30	29.5"	30.25"	20 psi	5 psi	10"	29.0"
515-36	35.5"	36.25"	20 psi	5 psi	10"	35.0"
515-42	41.5"	42.25"	20 psi	5 psi	10"	41.0"
515-48	47.5"	48.25"	20 psi	5 psi	10"	47.0"
515-54	53.5"	54.25"	20 psi	5 psi	10"	53.0"
515-60	59.5"	60.25"	20 psi	5 psi	10"	59.0"
515-66	65.5"	66.25"	20 psi	5 psi	10"	65.0"
515-72	71.5"	72.25"	20 psi	5 psi	10"	71.0"
515-78	77.5"	78.25"	20 psi	5 psi	10"	77.0"
515-84	83.5"	84.25"	20 psi	5 psi	10"	83.0"
515-90	89.5"	90.25"	20 psi	5 psi	10"	89.0"
515-96	95.5"	96.25"	20 psi	5 psi	10"	95.0"

MULTI-SIZE WASHING BALLS						
PART NUMBER	RANGE OF USE		REQUIRED INFLATION PRESSURE	PRODUCT DIMENSIONS		
	MINIMUM PIPE DIAMETER	MAXIMUM PIPE DIAMETER		LENGTH	DEFLATED DIAMETER	WEIGHT
210 -812	7.0"	12.5"	INFLATE UNTIL THE WASH BALL JUST FITS THE PIPE SNUG	18.0"	6.0"	8 lbs.
210-1518	14.0"	18.5"		25.0"	10.0"	18 lbs.
210-1824	17.0"	24.5"		32.0"	14.0"	50 lbs.
210-2030	19.0"	30.5"		42.0"	16.0"	60 lbs.
210-2436	23.0"	36.5"		55.0"	16.0"	80 lbs.
210-3648	35.0"	48.5"		84.0"	22.0"	120 lbs.
210-4860	47.0"	60.5"		76.0"	34.0"	175 lbs.

"E-Z PLUG" ADAPTERS & ACCESSORIES	
PART NUMBER	ITEM DESCRIPTION
700-00	E-Z Plug Adapter (bolt on)
705-00	E-Z Plug Adapter (by-pass)
711-23	Telescoping Fiberglass Pole